





CK801-10

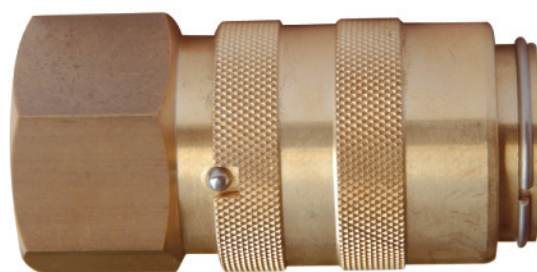

CK801-10TA

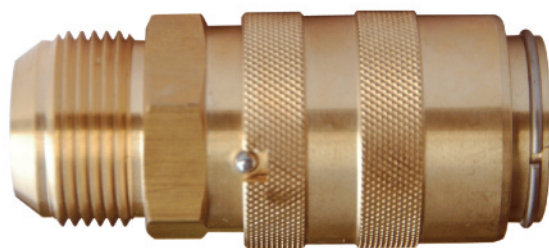


CK801-10H



CK801-10TB

單閉式 ▲
Single shut-off


開放式 ▲
Non-valved

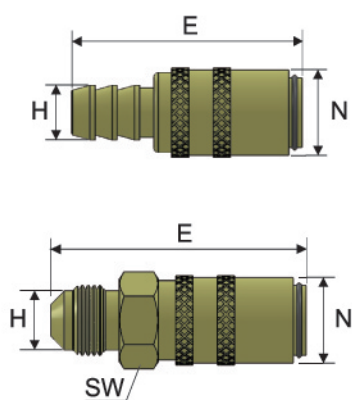


型號 ITEM NO.	E (長度) LENGTH (mm)	N (外徑) O.D. (mm)	SW	H(管接尺寸) TUBE SIZE	材質 MATERIAL
CK801-10	93	40		1" 塑膠軟管 (Hose)	銅 BRASS
CK801-12	93			1-1/4" 塑膠軟管 (Hose)	
CK801-6TA	81.5		35H	3/4"PT 內牙 (Female thread)	
CK801-6TB	86.5			3/4"PT 外牙 (Male thread)	
CK801-10TA	81.5		38H	1" PT 內牙 (Female thread)	
CK801-10TB	86.5		35H	1" PT 外牙 (male thread)	
CK801-10H	88.5			1" 喇叭口接頭 1-1/4"-12 37°flared	
適用流體 Application	空氣、水、油 Gas、Water、Oil	工作壓力 Working Pressure Max. 10 kg/cm²		工作溫度 Working Temp. 0~80℃ or 0~180℃	
 單閉式 Single shut-off		 直通式 Non-valved		Above item No. are single shut-off type , please add – OH after item No. if Non-valved type required 。 EX. : CK801-10-OH	

CK801型快速接頭專用模具插心



MALE PLUG FOR CK801 TYPE



CB-10T



CX-10



型號 ITEM NO.	E 1(長度) LENGTH (mm)	N (外徑) O.D. (mm)	D(管接尺寸) TUBE & THREAD	SW	材質 MATERIAL
CB-6T	49	25	3/4"PT	27H	銅 BRASS
CB-10T	51		1 "PT	35H	
CX-10	59		1" 塑膠軟管 (HOSE)		
CX-12	59		1-1/4" 塑膠軟管 (HOSE)		