

VF 水流量計 VF FLOW METER



VF 流量计
VF FLOW METER

FLOW RATE 10 LPM , 30 LPM
 MAX TEMPERATURE 240°F

MODEL NO	THREAD	FLOW RATE
VF3A10L	3/8"NPT	10 LPM
VF3A30L	3/8"NPT	30 LPM
VF4A10L	1/2"NPT	10 LPM
VF4A30L	1/2"NPT	30 LPM

FLOWMETER ONLY




VF4A10L




VF3A30L

MODEL NO	THREAD	FLOW RATE
VF3A10LB	3/8"NPT	10 LPM
VF3A30LB	3/8"NPT	30 LPM
VF4A10LB	1/2"NPT	10 LPM
VF4A30LB	1/2"NPT	30 LPM

FLOWMETER WITH VALVE

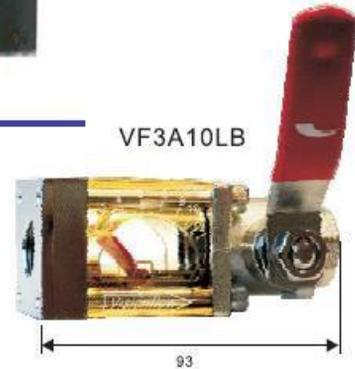

VF3A10LB



VF3B10L

74.5

MODEL NO	THREAD	FLOW RATE
VF3B10L	3/8"NPT	10 LPM
VF3B30L	3/8"NPT	30 LPM
VF4B10L	1/2"NPT	10 LPM
VF4B30L	1/2"NPT	30 LPM

THREAD	FLOW RATE
3/8"NPT	10 LPM
3/8"NPT	30 LPM
1/2"NPT	10 LPM
1/2"NPT	30 LPM

FLOWMETER & TEMP
 FLOWMETER & TEMP
 FLOWMETER & TEMP
 FLOWMETER & TEMP




VF3C10L

MODEL NO	THREAD	FLOW RATE
VF3C10L	3/8"NPT	10 LPM
VF3C30L	3/8"NPT	30 LPM
VF4C10L	1/2"NPT	10 LPM
VF4C30L	1/2"NPT	30 LPM

THREAD	FLOW RATE
3/8"NPT	10 LPM
3/8"NPT	30 LPM
1/2"NPT	10 LPM
1/2"NPT	30 LPM

FLOWMETER & PRESSURE
 FLOWMETER & PRESSURE
 FLOWMETER & PRESSURE
 FLOWMETER & PRESSURE




VF3B10LB

39


39

108



FLOWMETER & TEMP

74.5



FLOWMETER & PRESSURE

74.5

MODEL NO	THREAD	FLOW RATE
VF3B10LB	3/8"NPT	10 LPM
VF3B30LB	3/8"NPT	30 LPM
VF4B10LB	1/2"NPT	10 LPM
VF4B30LB	1/2"NPT	30 LPM

FLOWMETER WITH VALVE

FLOWMETER & TEMP
 FLOWMETER & TEMP
 FLOWMETER & TEMP
 FLOWMETER & TEMP



PS. We also provide GPM scale which is 3 GPM & 8 GPM

The model No. is different : 10L → 3G , 30L → 8G For example : VF3B10LB = VF3B3GB

MODEL NO	THREAD	FLOW RATE
VF3C10LB	3/8"NPT	10 LPM
VF3C30LB	3/8"NPT	30 LPM
VF4C10LB	1/2"NPT	10 LPM
VF4C30LB	1/2"NPT	30 LPM

FLOWMETER & PRESSURE
 FLOWMETER & PRESSURE
 FLOWMETER & PRESSURE
 FLOWMETER & PRESSURE

FLOWMETER WITH VALVE

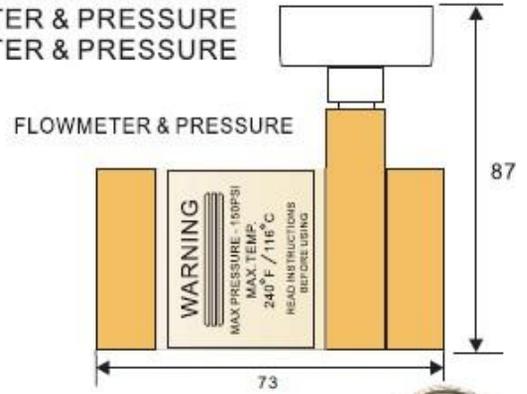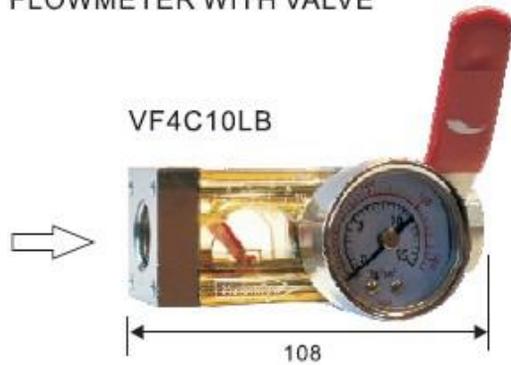



VISIONFLOW WATER FLOW METER
 FLOW RATE 10LPM , 30 LPM
 MAX TEMPERATURE 115°C



VF3D10L

MODEL NO	THREAD	FLOW RATE
VF3D10L	3/8"NPT	10 LPM
VF3D30L	3/8"NPT	30 LPM
VF4D10L	1/2"NPT	10 LPM
VF4D30L	1/2"NPT	30 LPM

FLOWMETER & TEMP & PRESSURE
 FLOWMETER & TEMP & PRESSURE
 FLOWMETER & TEMP & PRESSURE
 FLOWMETER & TEMP & PRESSURE

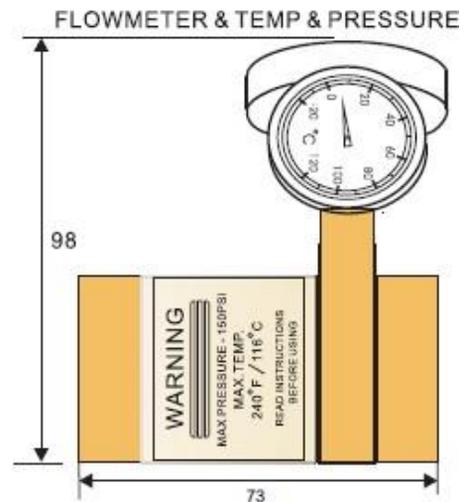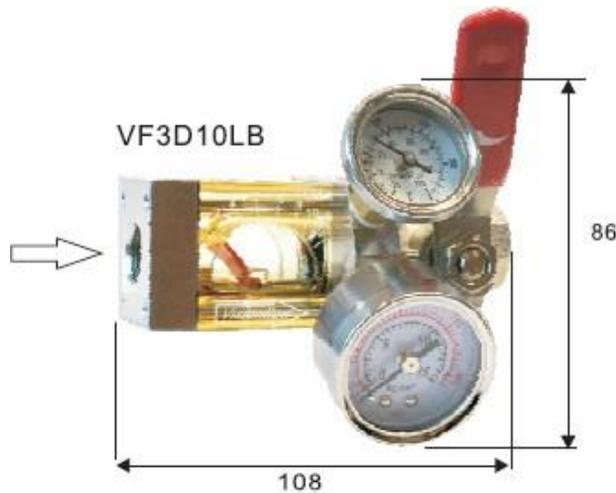

MODEL NO	THREAD	FLOW RATE
VF3D10LB	3/8"NPT	10 LPM
VF3D30LB	3/8"NPT	30 LPM
VF4D10LB	1/2"NPT	10 LPM
VF4D30LB	1/2"NPT	30 LPM

FLOWMETER & TEMP & PRESSURE
 FLOWMETER & TEMP & PRESSURE
 FLOWMETER & TEMP & PRESSURE
 FLOWMETER & TEMP & PRESSURE

FLOWMETER WITH VALVE

PS. We also provide GPM scale which is 3 GPM & 8 GPM .

The model No. is different : 10L → 3G , 30L → 8G


For example : VF3B10LB = VF3B3GB

VF4D30LB = VF4D8GB


FLOW RATE 60 LPM , 80 LPM
MAX TEMPERATURE 115°C

SPECIFICATIONS

OPERATING TEMPERATURE 240°F MAX.
 115°C MAX.
 PRESSURE 150 PSI MAX.
 10 KG/CM² MAX.
 ACCURACY ±10%
 THERMOMETER 0 TO 250°F
 -10 TO 115°C
 PRESSURE GAUGE 0-200 PSI
 15 KG/CM²

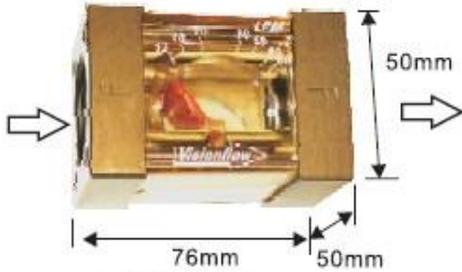

VF8A60L



VF6A80L


FLOWMETER ONLY

MODEL NO	THREAD	FLOW RATE	
VF6A60L	3/4"NPT	60 LPM	FLOW METER ONLY
VF6A80L	3/4"NPT	80 LPM	FLOW METER ONLY
VF8A60L	1"NPT	60 LPM	FLOW METER ONLY
VF8A80L	1"NPT	80 LPM	FLOW METER ONLY

FLOWMETER & TEMP



VF8B60L

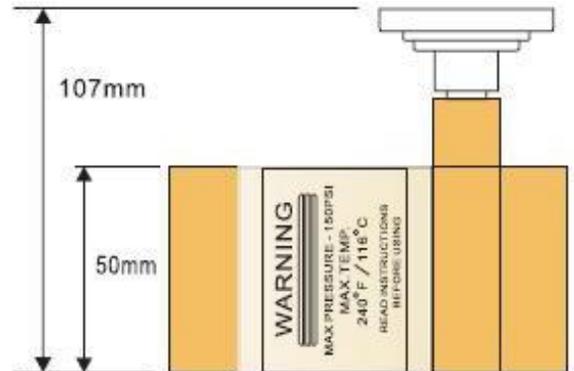


MODEL NO	THREAD	FLOW RATE	
VF6B60L	3/4"NPT	60 LPM	FLOWMETER & TEMP
VF6B80L	3/4"NPT	80 LPM	FLOWMETER & TEMP
VF8B60L	1"NPT	60 LPM	FLOWMETER & TEMP
VF8B80L	1"NPT	80 LPM	FLOWMETER & TEMP

FLOW RATE 60 LPM , 80 LPM
 MAX TEMPERATURE 115°C

FLOWMETER & PRESSURE



VF8C60L

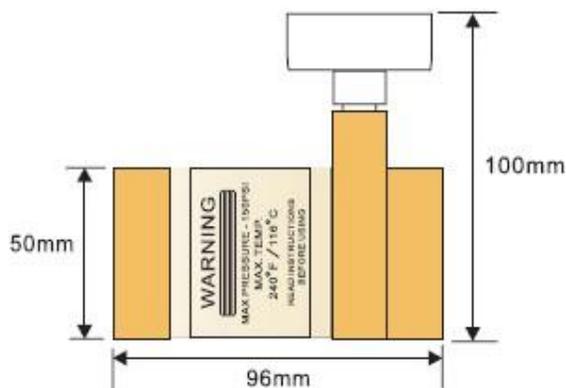


MODEL NO	THREAD	FLOW RATE	
VF6C60L	3/4"NPT	60 LPML	FLOWMETER & PRESSURE
VF6C80L	3/4"NPT	80 LPM	FLOWMETER & PRESSURE
VF8C60L	1"NPT	60 LPML	FLOWMETER & PRESSURE
VF8C80L	1"NPT	80 LPM	FLOWMETER & PRESSURE

FLOWMETER & TEMP & PRESSURE



VF8D60L

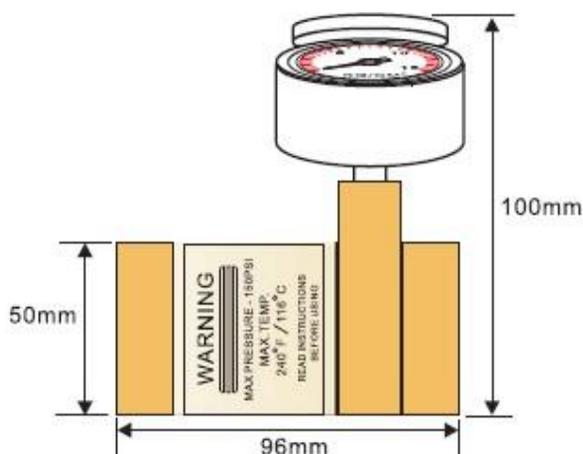

MODEL NO	THREAD	FLOW RATE	
VF6D60L	3/4"NPT	60 LPML	FLOWMETER & TEMP & PRESSURE
VF6D80L	3/4"NPT	80 LPM	FLOWMETER & TEMP & PRESSURE
VF8D60L	1"NPT	60 LPML	FLOWMETER & TEMP & PRESSURE
VF8D80L	1"NPT	80 LPM	FLOWMETER & TEMP & PRESSURE

FLOWMETER & TWO 1/8"NPT COUPLE



VF8E60L



MODEL NO	THREAD	FLOW RATE	
VF6E60L	3/4"NPT	60 LPML	FLOWMETER ONLY & TWO 1/8"NPT COUPLE
VF6E80L	3/4"NPT	80 LPM	FLOWMETER ONLY & TWO 1/8"NPT COUPLE
VF8E60L	1"NPT	60 LPML	FLOWMETER ONLY & TWO 1/8"NPT COUPLE
VF8E80L	1"NPT	80 LPM	FLOWMETER ONLY & TWO 1/8"NPT COUPLE

SPECIFICATIONS

- Operating Temp 240°F max. (115°C max.)
- Pressure 100 psi max. (7 kg/cm² max.)
- Accuracy ±10%
- Thermometer 0° to 250°F (-20° to 120°C)
- Pressure Gauge 0 to 210 psi (0 to 15 kg/cm²)

MATERIALS

- Body Anodized Aluminum*
- Pin Stainless Steel
- Vane Stainless Steel
- Spring Stainless Steel
- O-Rings EDP
- Cap Screws Stainless Steel



Dimensions: 2.25"H x 2.25"D x 4.75"L

* Aluminum Body with special impregnated black anodized hard ceramic coating to stop corrosion and/or erosion.

<Inlet size (8) 1"NPT
(10) 1-1/4"NPT >

Body drilled, tapped 1/8" NPT and plugged for gauges.

VF8E40G(100L)
VF10E40G(100L)



VF8B40G(100L) thermometer
VF10B40G(100L)



VF8C40G(100L) pressure gauge
VF10C40G(100L)



VF8D40G(100L)
VF10D40G(100L)

PS. We also provide GPM scale which is 15 GPM & 20 GPM .The model No. is different : 60L→ 15G , 80L→20G . For example : VF6E60L = VF6E15G , VF8D80L = VF8D20G


SPECIFICATIONS

OPERATING TEMPERATURE	240°F MAX. 115°C MAX.
PRESSURE	150 PSI MAX. 10 KG/CM ²
ACCURACY	MAX.
THERMOMETER	+10% °
PRESSURE GAUGE	0 TO 250 F° 0-200 PSI ²



MODEL NO	THREAD	FLOW RATE
VF 8B160L	1" BSPF	160 LPM
VF10B160L	1 1/4" BSPF	160 LPM




FLOW METER WITH TEMP

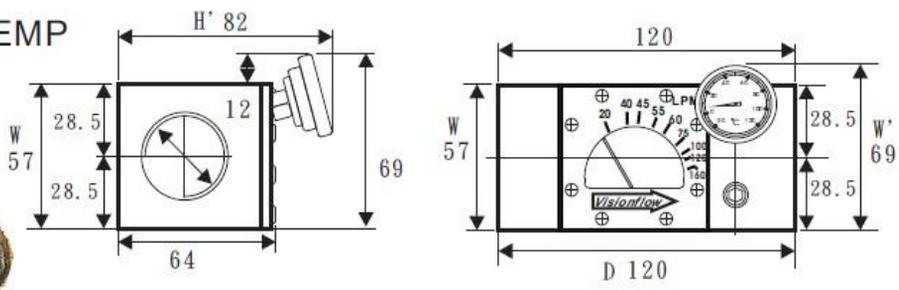

FLOW RATE 160 LPM,
MAX TEMPERATURE 115°C

MODEL NO	THREAD	FLOW RATE
VF 8C160L	1" BSPF	160 LPM
VF10C160L	1 1/4" BSPF	160 LPM

FLOW METER WITH PRESSURE

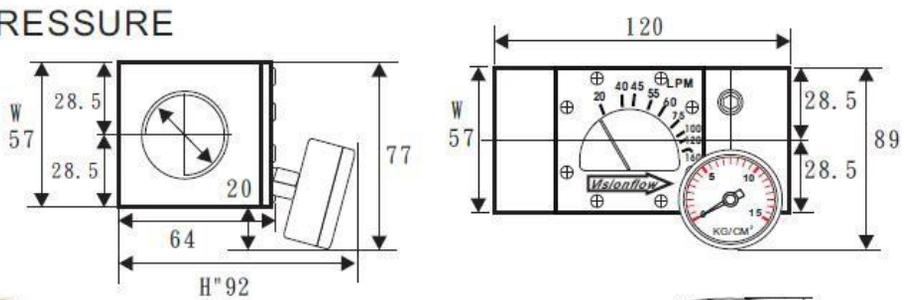


SPECIFICATIONS

OPERATING TEMPERATURE 240°F MAX.
 115°C MAX.
 PRESSURE 150 PSI MAX.
 10 KG/CM²
 ACCURACY MAX.
 THERMOMETER +10%
 PRESSURE GAUGE -10 TO 115 C
 0-200 PSI²

VF 8 B 160L
 160L = 160LPM
 B = FLOWMETER & TEMP
 C = FLOWMETER & PRESSURE
 D = FLOWMETER & TEMP & PRESSURE
 E = FLOWMETER & TWO 1/8" NPT COUPLE
 8 = 1" BSPF COUPLE
 10 = 1 1/4" BSPF COUPLE
 VF = VISIONFLOW


MODEL NO	THREAD	FLOW RATE
VF 8D160L	1" BSPF	160 LPM
VF10D160L	1 1/4" BSPF	160 LPM

FLOW METER & TEMP & PRESSURE

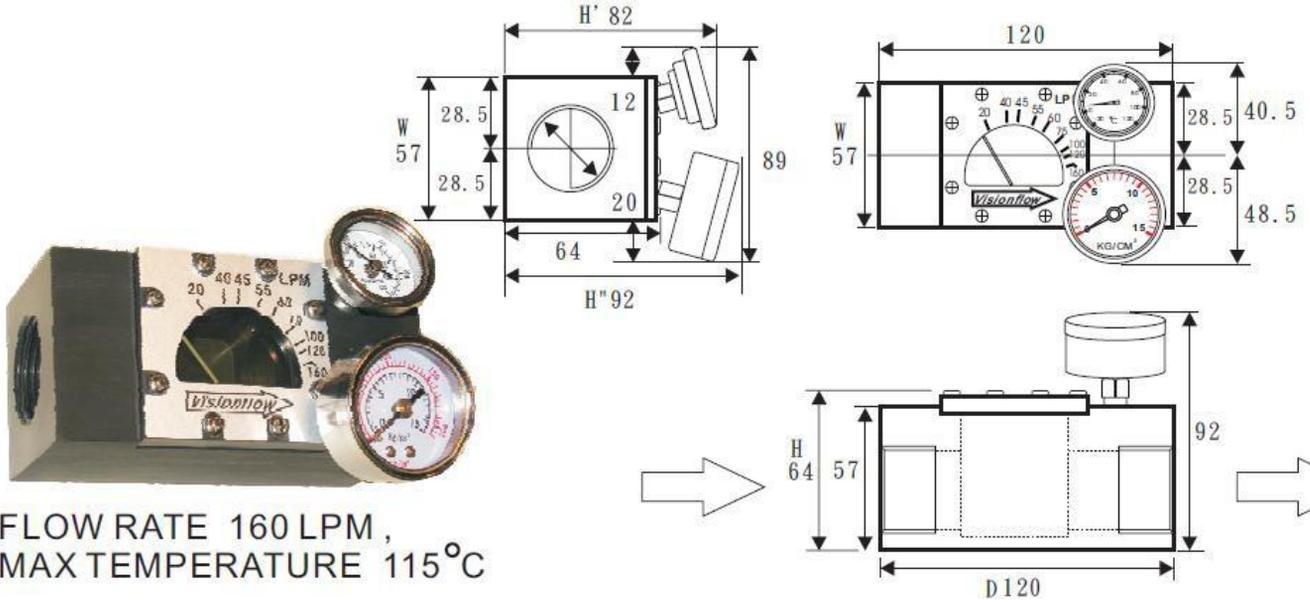

MODEL NO	THREAD	FLOW RATE
VF 8E160L	1" BSPF	160 LPM
VF10E160L	1 1/4" BSPF	160 LPM

FLOW METER WITH TWO SPARE 1/8" THREAD

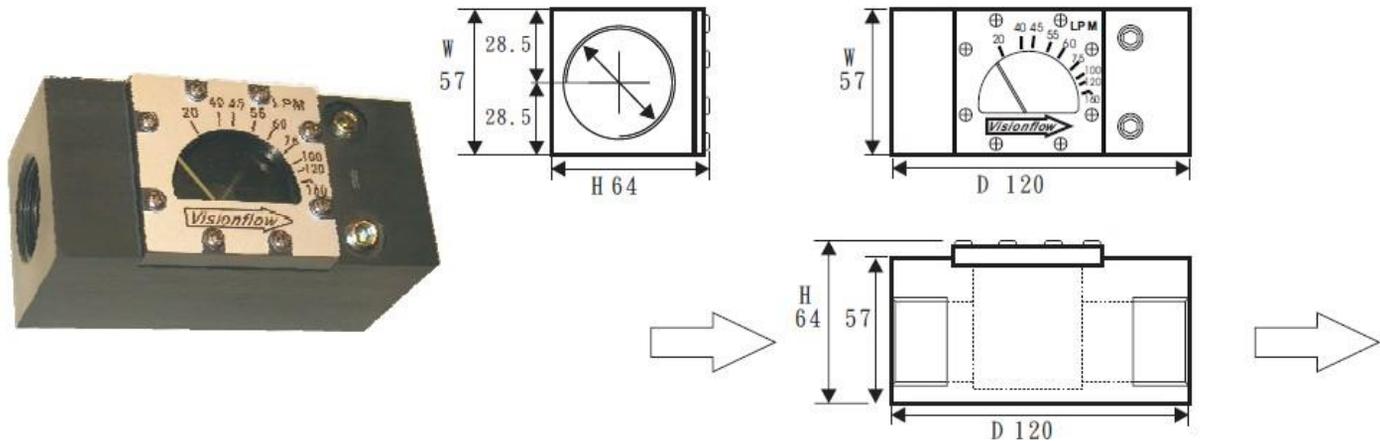



SPECIFICATIONS

OPERATING TEMPERATURE	240°F MAX. 115°C MAX.
PRESSURE	150 PSI MAX. 10 KG/CM ²
ACCURACY	MAX.
THERMOMETER	+10% °
PRESSURE GAUGE	0 TO 250 F° 0-200 PSI ²



MODEL NO	THREAD	FLOW RATE
VF 8B40G	1"NPT	40 GPM
VF10B40G	1 1/4"NPT	40 GPM



FLOW METER WITH TEMP

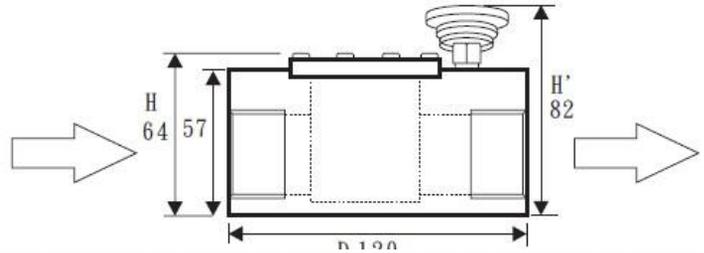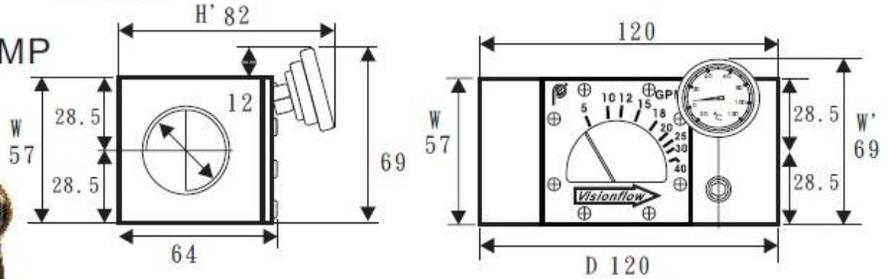

FLOW RATE 40 GPM , 40 GPM
MAX TEMPERATURE 240 F

MODEL NO	THREAD	FLOW RATE
VF 8C40G	1" NPT	40 GPM
VF10C40G	1 1/4" NPT	40 GPM

FLOW METER WITH PRESSURE

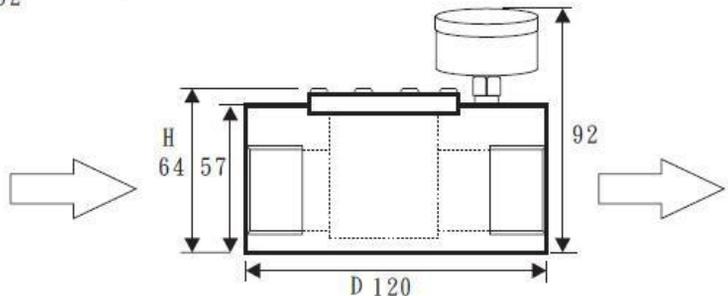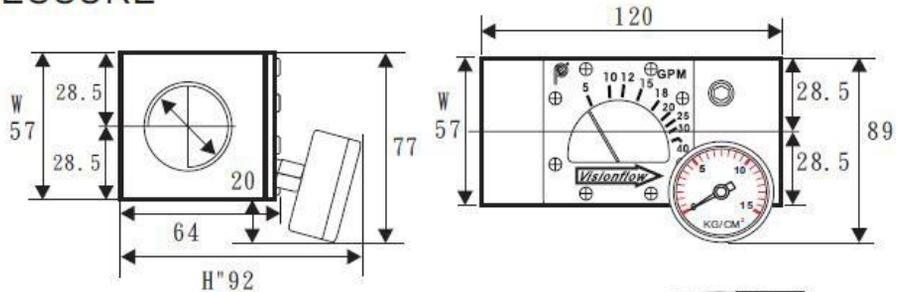



SPECIFICATIONS

OPERATING TEMPERATURE	240°F MAX. 115°C MAX.
PRESSURE	150 PSI MAX. 10 KG/CM ²
ACCURACY	MAX.
THERMOMETER	+10% 0 TO 250 F° -10 TO 115 C
PRESSURE GAUGE	0-200 PSI ²



MODEL NO	THREAD	FLOW RATE
VF 8D40G	1" NPT	40 GPM
VF10D40G	1 1/4" NPT	40 GPM




FLOW METER & TEMP & PRESSURE

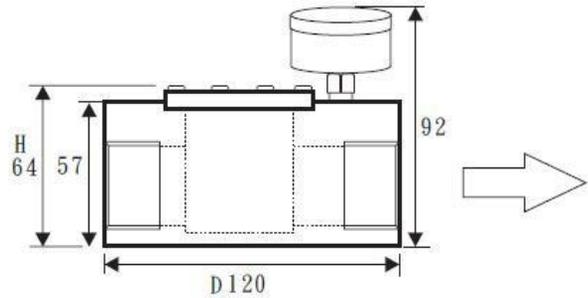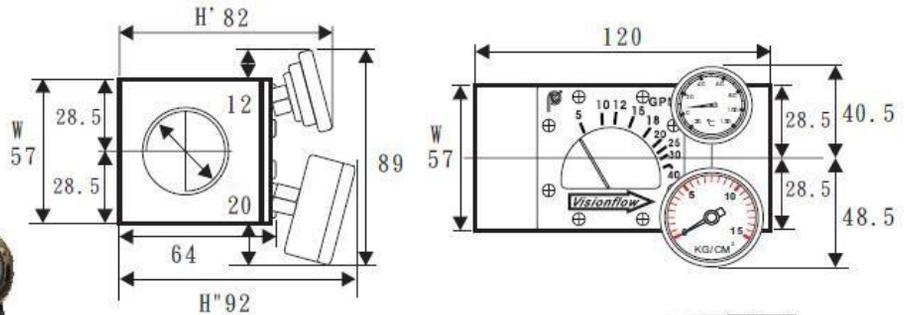

FLOW RATE 40 GPM , 40 GPM
MAX TEMPERATURE 240 F






MODEL NO	THREAD	FLOW RATE
VF 8E40G	1" NPT	40 GPM
VF10E40G	1 1/4" NPT	40 GPM

FLOW METER WITH TWO SPARE 1/8" THREAD

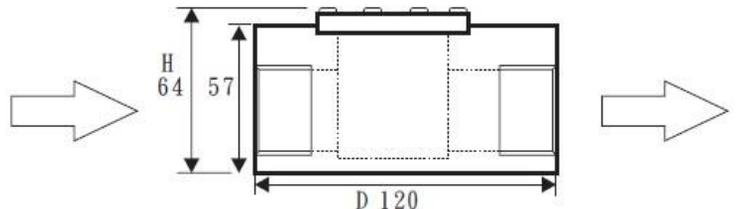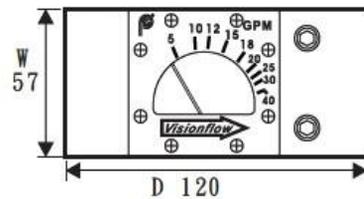






MODEL NO	THREAD	FLOW RATE
VF12B400L	1 1/2" BSPF	400 LPM
VF16B400L	2" BSPF	400 LPM

FLOW METER WITH TEMP



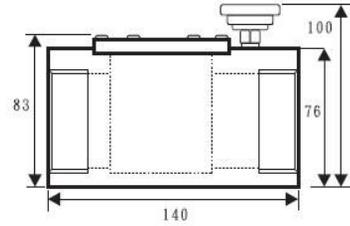




MODEL NO	THREAD	FLOW RATE
VF12C400L	1 1/2" BSPF	400 LPM
VF16C400L	2" BSPF	400 LPM






FLOW METER WITH PRESSURE

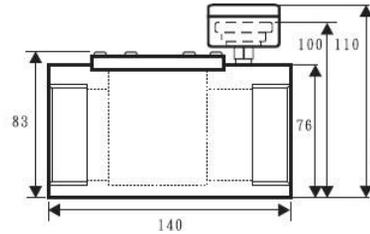






MODEL NO	THREAD	FLOW RATE
VF12D400L	1 1/2" BSPF	400 LPM
VF16D400L	2" BSPF	400 LPM

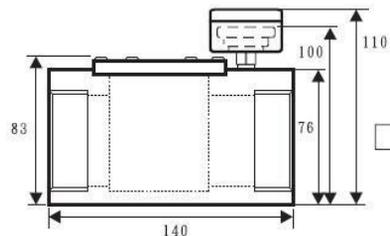

MODEL NO	THREAD	FLOW RATE
VF12E400L	1 1/2" BSPF	400 LPM
VF16E400L	2" BSPF	400LPM







VF12B100G
VF16B100G

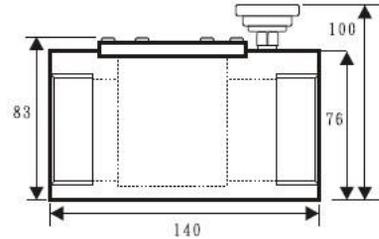

FLOW RATE 100 GPM , 100 GPM
MAX TEMPERATURE 240° F

MODEL NO	THREAD	FLOW RATE
VF12C100G	1 1/2" NPT	100 GPM
VF16C100G	2" NPT	100 GPM

FLOW METER WITH PRESSURE

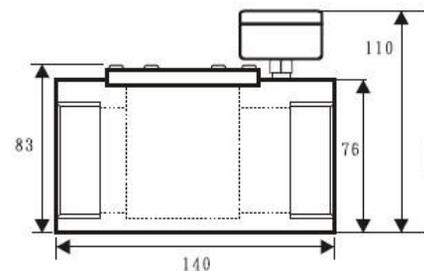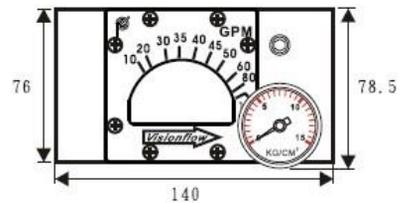




SPECIFICATIONS

OPERATING TEMPERATURE	240°F MAX. 115°C MAX.
PRESSURE	150 PSI MAX. 10 KG/CM ² MAX.
ACCURACY	±10%
THERMOMETER	0 TO 250°F -10 TO 115°C
PRESSURE GAUGE	0-200 PSI 15 KG/CM ²



MODEL NO	THREAD	FLOW RATE
VF12D100G	1 1/2" NPT	100 GPM
VF16D100G	2" NPT	100 GPM

FLOW METER & TEMP & PRESSURE

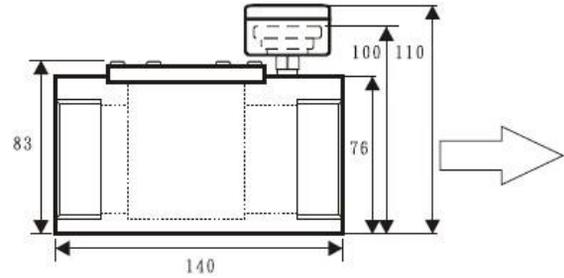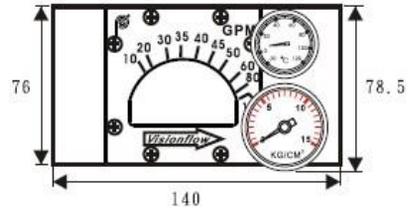

FLOW RATE 100 GPM , 100 GPM
MAX TEMPERATURE 240 F

MODEL NO	THREAD	FLOW RATE
VF12E100G	1 1/2" NPT	100 GPM
VF16E100G	2" NPT	100 GPM

FLOW METER WITH TWO SPARE 1/8" THREAD

